
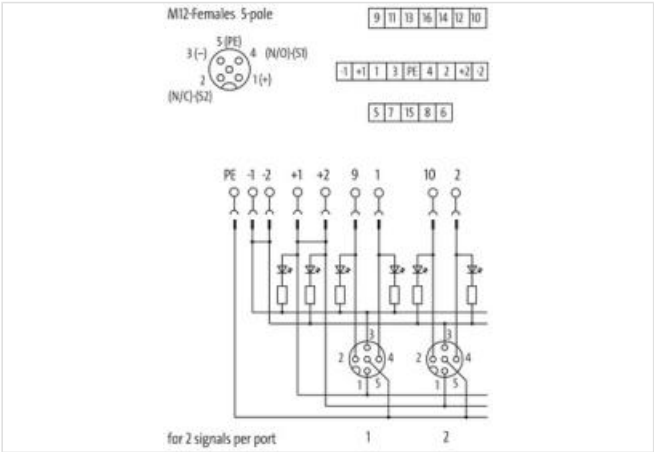
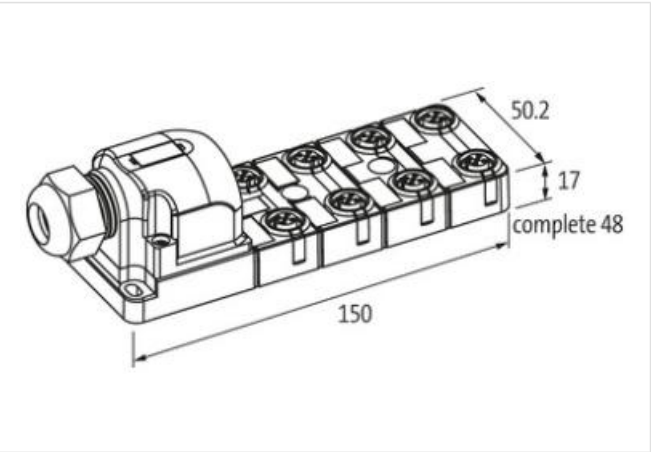


EXACT12, 8XM12, 5-POLE, CAP, PLUG. SCREW-TERM.

8-way, 5-pole  
Form PNP  
Screw plug-in terminals  
Plastic housings with good resistance against chemicals and oils.  
The resistance to aggressive media should be individually tested for your application. Further details on request.

Link naar het product

Afbeelding

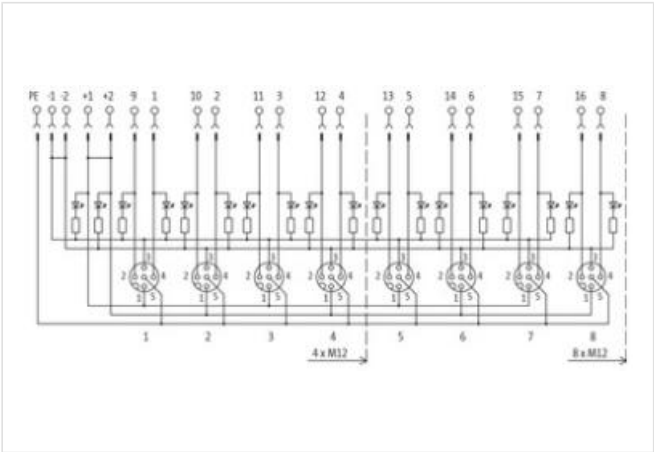

Product van afwijken van afbeelding



| Commerciële gegevens |          |
|----------------------|----------|
| ECLASS-6.0           | 27143423 |
| ECLASS-6.1           | 27279219 |
| ECLASS-7.0           | 27279219 |
| ECLASS-8.0           | 27279219 |
| ECLASS-9.0           | 27440111 |
| ECLASS-10.1          | 27440111 |

|                                                 |                         |
|-------------------------------------------------|-------------------------|
| ECLASS-11.1                                     | 27440111                |
| ECLASS-12.0                                     | 27440111                |
| ETIM-5.0                                        | EC002585                |
| Douane tarief nummer                            | 85369010                |
| GTIN                                            | 4048879053846           |
| Verpakkingseenheid                              | 1                       |
| <b>Electrical data   Supply</b>                 |                         |
| Operating voltage DC                            | 24 V                    |
| Current operating per contact max.              | 4 A                     |
| Total current max.                              | 8 A                     |
| <b>Installation</b>                             |                         |
| Connection cross section max.                   | 1,5 mm <sup>2</sup>     |
| AWG number max.                                 | 16                      |
| <b>Installation   Connection</b>                |                         |
| Connection                                      | Screw plug-in terminals |
| <b>Device protection   Electrical</b>           |                         |
| Degree of protection (EN IEC 60529)             | IP65, IP67              |
| <b>Device protection   Media</b>                |                         |
| Flame resistance                                | flame retardant         |
| <b>Mechanical data   Material data</b>          |                         |
| Material housing                                | Plastic                 |
| <b>Environmental characteristics   Climatic</b> |                         |
| Operating temperature min.                      | -20 °C                  |
| Operating temperature max.                      | 70 °C                   |
| <b>Connection type 2</b>                        |                         |
| Family construction form                        | Cap                     |
| No. of poles                                    | 21                      |
| Family construction form                        | M12                     |
| Gender                                          | female                  |
| Color contact carrier                           | black                   |
| Coding                                          | A                       |
| No. of poles                                    | 5                       |
| PIN 1                                           | +                       |
| PIN 2                                           | NC S 2                  |
| PIN 3                                           | -                       |
| PIN 4                                           | NO S 1                  |
| PIN 5                                           | PE                      |