



MICO FUSE 24 LED FUSE HOLDER 5X20MM 8 CHANNELS

IN: 24 V DC OUT: 24 V / 6 A

MICO FUSE 24 LED
8 channels
Total current: max. 40 A

[Link naar het product](#)

Afbeelding

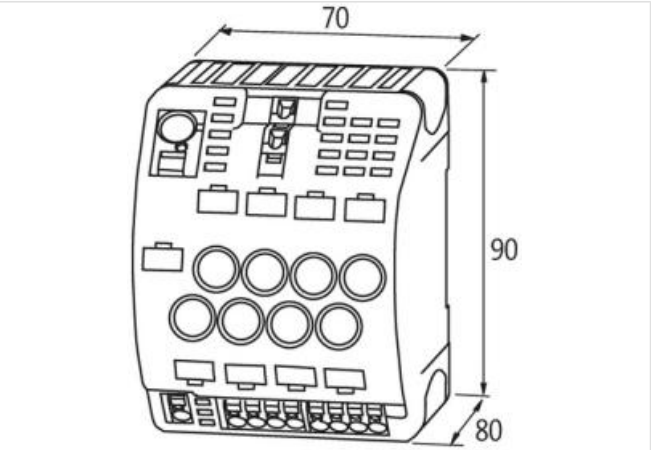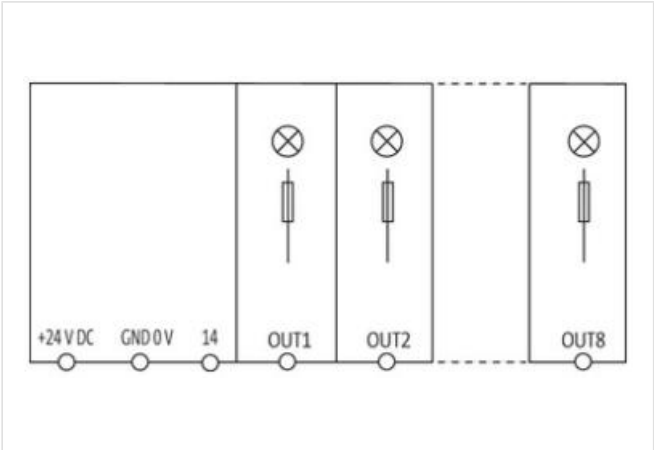

Product van afwijken van afbeelding



Commerciële gegevens	
ECLASS-6.0	27371802
ECLASS-6.1	27142107
ECLASS-7.0	27142121
ECLASS-8.0	27142121
ECLASS-9.0	27142121
ECLASS-10.1	27142121
ECLASS-11.1	27142121

ECLASS-12.0	27142121
ETIM-5.0	EC001440
Douane tarief nummer	85363030
GTIN	4048879335263
Verpakkingseenheid	1
Electrical data Supply	
Operating voltage DC	24 V
Operating voltage DC min.	18 V
Operating voltage DC max.	30 V
Operating current max.	6 A
Total current max.	40 A
Electrical data Output	
Switching current max.	20 mA
Installation	
Connection cross-section inputs max.	16 mm ²
Connection cross-section outputs min.	0,5 mm ²
Connection cross-section outputs max.	4 mm ²
Connection cross-section control inputs / control outputs max.	2,5 mm ²
Mechanical data Mounting data	
Mounting method	geschnappt
Suitable for mounting type	Mounting rail TH35, (EN 60715)
Height	90 mm
Width	70 mm
Depth	80 mm
Environmental characteristics Climatic	
Operating temperature min.	-25 °C
Operating temperature max.	55 °C
Derating from	40 °C
Connection type 5	
Connection	Spring clamp terminals FK
Family construction form	terminal
Gender	female
Color contact carrier	green
No. of poles	1
PIN 1	24 V DC
Connection	Spring clamp terminals FK
Family construction form	terminal
Gender	female
Color contact carrier	green
No. of poles	1
PIN 1	0 V
Connection	Spring clamp terminals FK
Family construction form	terminal
Gender	female
Color contact carrier	green
No. of poles	2
PIN 1	n.c.
PIN 2	14
Connection	Spring clamp terminals FK
Family construction form	terminal
Gender	female

Color contact carrier	green
No. of poles	4
PIN 1	Out 1
PIN 2	Out 2
PIN 3	Out 3
PIN 4	Out 4
Connection	Spring clamp terminals FK
Family construction form	terminal
Gender	female
Color contact carrier	green
No. of poles	4
PIN 1	Out 5
PIN 2	Out 6
PIN 3	Out 7
PIN 4	Out 8