

MSCON-C

Femelle droit
M23, 19 pôles
Borne à souder

[Lien vers le produit](#)

Illustration

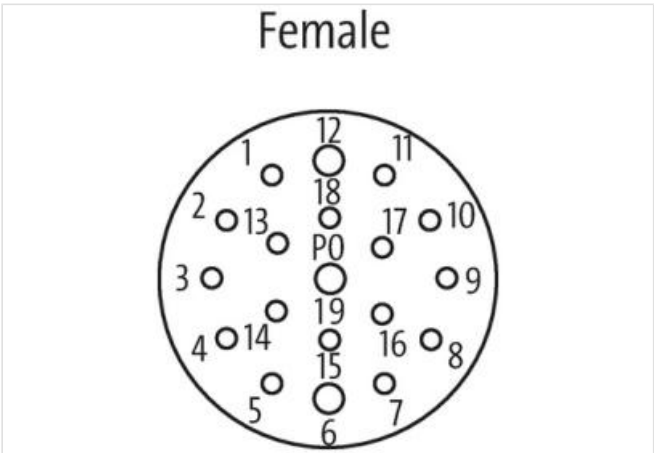
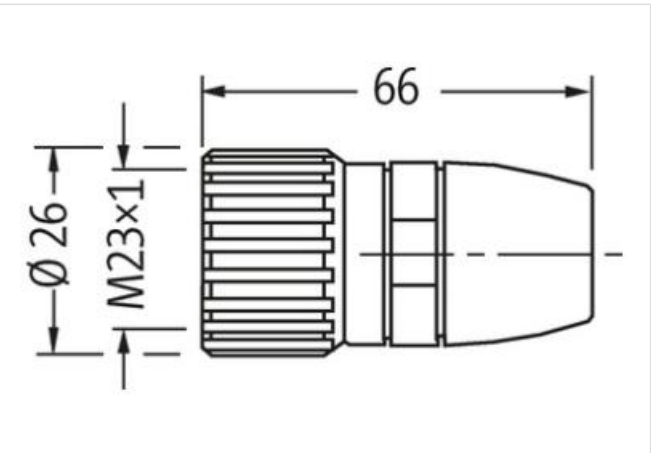
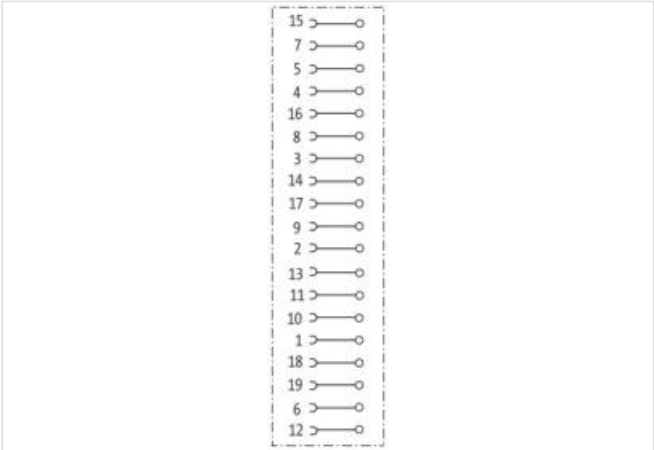


Photo non contractuelle

Indice de protection (EN CEI 60529)	IP67
données commerciales	
ECLASS-6.0	27279221
ECLASS-6.1	27260702
ECLASS-7.0	27440102
ECLASS-8.0	27440102
ECLASS-9.0	27440116
ECLASS-10.1	27440102
ECLASS-11.1	27440102
ECLASS-12.0	27440116
ETIM-5.0	EC001855
GTIN	4048879187978
Numéro du tarif douanier	85366990

Unité de conditionnement 1

Caractéristiques électriques | Alimentation

Tension de service CA max.	125 V
Tension de service CC max.	125 V
Courant de service max. par contact	8 A

Caractéristiques techniques | Installation

Section de raccordement max.	1 mm²
------------------------------	-------

Installation | Raccordement

Connection information	Fût à souder
------------------------	--------------

Protection des appareils | Électrique

Condition supplémentaire Indice de protection	enfiché, Vissé
---	----------------

Données mécaniques | Données de montage

Plage de serrage min.	8 mm
Plage de serrage max.	14 mm

Caractéristiques environnementales | Climatique

Température de service min.	-25 °C
Température de service max.	85 °C

Important installation notes

Note on strain relief	Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties.
Note on bending radius	Attention: Observe the permissible bending radii when laying cables, as the IP protection class can be endangered by excessive bending forces.