

**MUW ANALOG COUPLER COMPONENT**

IN: 0..10 V - OUT: 0..10 V

INPUT: 0...10 V DC

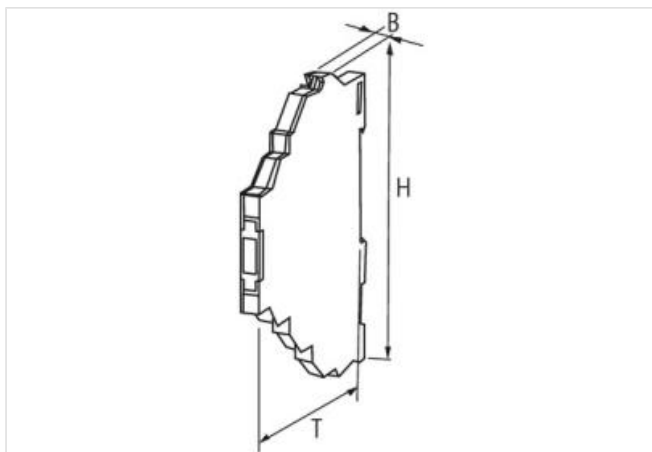
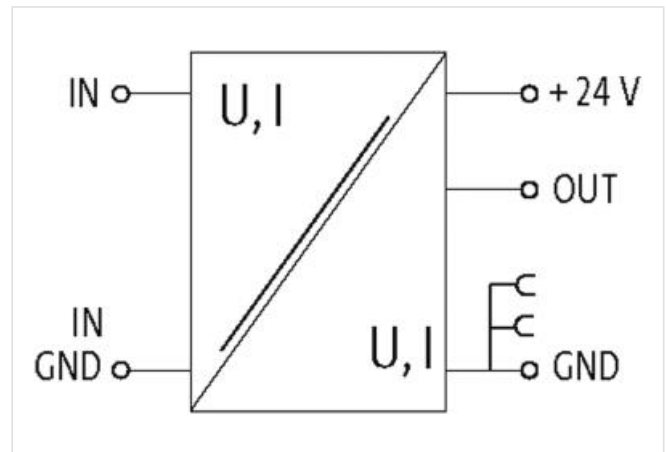
OUTPUT: 0...10 V DC, 20 mA

with bridge system

Spring clamp terminals

Input and output galvanically separated

The Murrelektronik analog converters convert standard signal formats (0...10 V, 0...20 mA, 4...20 mA) galvanically separated into one of these signal formats. Due to an integrated current limiter the output is short-circuit and overload protected. Module MIIW – 0/4...20 mA to 0/4...20 mA – without auxiliary supply

[Link to Product](#)**Illustration**

Product may differ from Image

**Commercial data**

ECLASS-6.0	27210990
ECLASS-6.1	27210901

ECLASS-7.0	27210901
ECLASS-8.0	27210901
ECLASS-9.0	27210901
ECLASS-10.1	27210901
ECLASS-11.1	27210901
ECLASS-12.0	27210901
ETIM-5.0	EC002498
customs tariff number	85437090
GTIN	4048879022507
Packaging unit	1

**Electrical data**

Accuracy (of full scale)	0,5 %
--------------------------	-------

**Electrical data | Supply**

Operating voltage DC	24 V
Operating voltage DC min.	19,2 V
Operating voltage DC max.	28,8 V
Operating current min.	50 mA
Operating current max.	70 mA

**Electrical data | Input**

Input resistor	200 k $\Omega$
----------------	----------------

**Electrical data | Output**

Output current max.	0,025 A
Working resistance max.	500 $\Omega$

**Industrial communication**

Transmission frequency max.	500 Hz
-----------------------------	--------

**Device protection | Electrical**

Rated surge voltage	2,5 kV
---------------------	--------

**Mechanical data | Mounting data**

Mounting method	geschnappt
Suitable for mounting type	mounting rail, (EN 60715)
Height	91 mm
Width	6,2 mm
Depth	70 mm

**Environmental characteristics | Climatic**

Operating temperature min.	0 °C
Operating temperature max.	60 °C

**Connection type 5**

Connection	Screw terminals SK
Family construction form	terminal
Gender	female
No. of poles	1
PIN 1	GD 1
Connection	Screw terminals SK
Family construction form	terminal
Gender	female
No. of poles	1
PIN 1	In
Connection	Screw terminals SK
Family construction form	terminal
Gender	female
No. of poles	1

PIN 1	+ 24 V DC
Connection	Screw terminals SK
Family construction form	terminal
Gender	female
No. of poles	1
PIN 1	Out
Connection	Screw terminals SK
Family construction form	terminal
Gender	female
No. of poles	1
PIN 1	GD