



PRE-WIRED CAP FOR EXACT8, 4XM8, 3 POLE

3.0m PUR 4X0.34+2x0,75, UL/CSA

3.0 m

[Link to Product](#)

Illustration

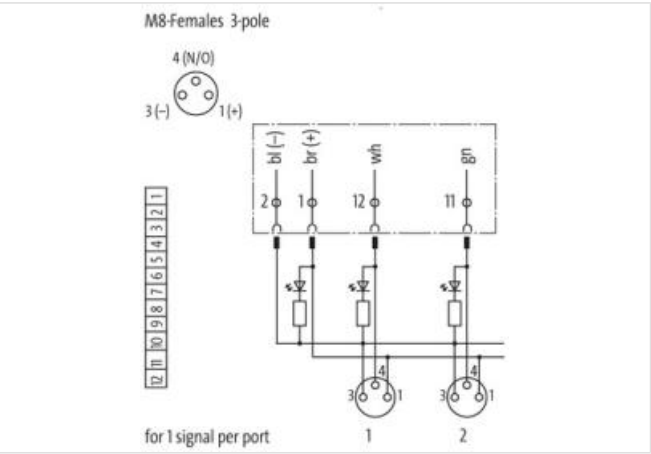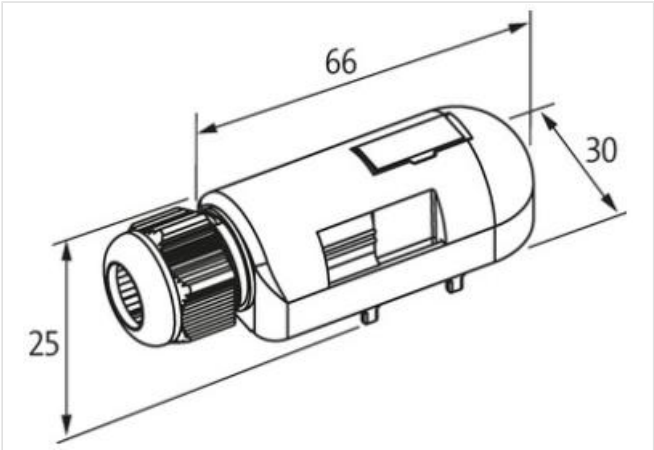

Product may differ from Image



| Commercial data |          |
|-----------------|----------|
| ECLASS-6.0      | 27143423 |
| ECLASS-6.1      | 27279219 |
| ECLASS-7.0      | 27279219 |
| ECLASS-8.0      | 27279219 |
| ECLASS-9.0      | 27440108 |
| ECLASS-10.1     | 27440108 |
| ECLASS-11.1     | 27440108 |
| ECLASS-12.0     | 27440108 |

|                       |               |
|-----------------------|---------------|
| ETIM-5.0              | EC002585      |
| customs tariff number | 85444290      |
| GTIN                  | 4048879056397 |
| Packaging unit        | 1             |

**Electrical data | Supply**

|                    |     |
|--------------------|-----|
| Total current max. | 8 A |
|--------------------|-----|

**Device protection | Media**

|                  |                 |
|------------------|-----------------|
| Flame resistance | flame retardant |
|------------------|-----------------|

**Mechanical data | Material data**

|                  |         |
|------------------|---------|
| Material housing | Plastic |
|------------------|---------|

**Environmental characteristics | Climatic**

|                                        |                            |
|----------------------------------------|----------------------------|
| Operating temperature min.             | -20 °C                     |
| Operating temperature max.             | 80 °C                      |
| Additional condition temperature range | depending on cable quality |

**Installation | Cable**

|                                                 |                                                                           |
|-------------------------------------------------|---------------------------------------------------------------------------|
| Cable identification                            | 334                                                                       |
| Jacket Color                                    | gray                                                                      |
| Type of Certificate                             | cURus                                                                     |
| Amount stranding                                | 1                                                                         |
| Stranding                                       | 6 wires around Filler twisted                                             |
| Banding                                         | Fleece                                                                    |
| Filler                                          | yes                                                                       |
| wire arrangement                                | brown, blue, gray, yellow, green, white                                   |
| Cable weight                                    | 78,1 g/m                                                                  |
| Material jacket                                 | PUR                                                                       |
| Shore hardness jacket                           | 89 ± 5 Shore A                                                            |
| Freedom from ingredients (jacket)               | lead-free, cadmium-free, CFC-free, halogen-free, silicone-free, LABS-free |
| Outer-diameter (jacket)                         | 7,6 mm                                                                    |
| Tolerance outer diameter (sheath)               | ± 5 %                                                                     |
| Material wire insulation                        | TPE-E                                                                     |
| Amount wires                                    | 4                                                                         |
| Outer diameter insulation                       | 1,5 mm                                                                    |
| Outer diameter tolerance core insulation        | ± 5 %                                                                     |
| Shore hardness wire insulation                  | 55 Shore D                                                                |
| Ingredient freeness wire insulation             | lead-free, CFC-free, halogen-free                                         |
| Amount strands (wire)                           | 42                                                                        |
| Diameter of single wires                        | 0,1 mm                                                                    |
| Conductor crosssection (wire)                   | 0,34 mm²                                                                  |
| Material conductor wire                         | Stranded copper wire, bare                                                |
| Conductor type (wire)                           | strand class 6                                                            |
| Traversing distance (C-track)                   | 5 m @ 25 °C   horizontal                                                  |
| Material wire insulation (Data)                 | TPE-E                                                                     |
| Outer diameter wire insulation (Data)           | 1,8 mm                                                                    |
| Tolerance outer diameter wire insulation (data) | ± 5 %                                                                     |
| Shore hardness wire insulation (Data)           | 55 Shore D                                                                |
| Ingredient freeness wire insulation (Data)      | lead-free, cadmium-free, CFC-free, halogen-free                           |
| Amount wires (Data)                             | 2                                                                         |
| Amount strands wire (Data)                      | 42                                                                        |
| Diameter of single wires (Data)                 | 0,15 mm                                                                   |
| Conductor crosssection wire (Data)              | 0,75 mm²                                                                  |
| Material conductor wire (Data)                  | Stranded copper wire, bare                                                |
| Wire conductor type (Data)                      | strand class 6                                                            |

|                                                   |                                                      |
|---------------------------------------------------|------------------------------------------------------|
| Max. rated voltage (conductor - conductor)        | 300 V                                                |
| Max. rated voltage (conductor - ground)           | 300 V                                                |
| Current load capacity (standard)                  | to DIN VDE 0298-4                                    |
| Current load capacity min. wire                   | 4,2 A                                                |
| Current load capacity min. Wire (Data)            | 8,4 A                                                |
| Electrical resistance line constant wire          | 57 $\Omega$ /km @ 20 °C                              |
| Electrical resistance coating wire (Data)         | 26 $\Omega$ /km @ 20 °C                              |
| AC withstand voltage (wire - wire)                | 2 kV @ 60 s                                          |
| Power frequency withstand voltage (wire - jacket) | 2 kV @ 60 s                                          |
| Min. operating temperature (static)               | -40 °C                                               |
| Max. operating temperature (fixed)                | 80 °C                                                |
| Operating temperature min. (dynamic)              | -5 °C                                                |
| Operating temperature max. (dynamic)              | 80 °C                                                |
| Flame resistance                                  | IEC 60332-2-2   UL 1581 § 1090   UL 1581 § 1100 FT2  |
| chemical resistance                               | Good, application-related testing                    |
| Gasoline resistance                               | Good, application-related testing                    |
| Oil resistance                                    | DIN EN 60811-404   Good, application-related testing |
| Bending radius (installation)                     | x Outer diameter                                     |
| Bending radius (fixed)                            | 7,5 x Outer diameter                                 |
| Bending radius (dynamic)                          | 10 x Outer diameter                                  |
| Travel speed (C-track)                            | 5 Mio. @ 25 °C                                       |

**Connection type 2**

|                          |                |
|--------------------------|----------------|
| Family construction form | free cable end |
| No. of poles             | 6              |
| Family construction form | M8             |
| Gender                   | female         |
| Color contact carrier    | black          |
| Coding                   | A              |
| No. of poles             | 3              |
| PIN 1                    | +              |
| PIN 3                    | -              |
| PIN 4                    | S              |