


RM 41/24VDC OUTPUT RELAY

IN: 24 VDC - OUT: 250 VAC/DC / 5 A

4 relays; each 1 NO contact
5 A
24 V DC
Screw terminals

[Link naar het product](#)

Afbeelding

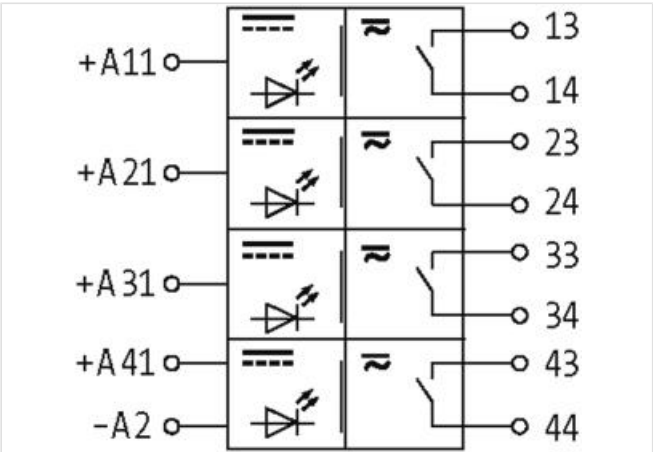

Product van afwijken van afbeelding



Commerciële gegevens	
ECLASS-6.0	27371601
ECLASS-6.1	27371601
ECLASS-7.0	27371601
ECLASS-8.0	27371601
ECLASS-9.0	27371601
ECLASS-10.1	27371601

ECLASS-11.1	27371601
ECLASS-12.0	27371601
ETIM-5.0	EC001437
Douane tarief nummer	85364900
GTIN	4048879024907
Verpakkingseenheid	1

Electrical data | Input

Input voltage DC	24 V
Input voltage DC min.	19,2 V
Input voltage DC max.	30 V
Input current	16 mA

Electrical data | Output

Utilization category AC-15 (EN IEC 60947-5-1)	3 A @ 24 V, 3 A @ 110 V, 3 A @ 230 V
Utilization category DC-13 (EN IEC 60947-5-1)	1,5 A @ 24 V, 0,3 A @ 110 V, 0,15 A @ 230 V
Additional condition switching frequency	with load
Switching frequency max.	0,1 Hz
Power rating AC max.	1250 VA
Power rating DC max.	240 W
Switching voltage AC max.	250 V
Switching voltage DC max.	250 V
Switching current DC	100 mA
Switching current max.	5 A
Switching capacity AC-12 (EN IEC 60947-5-1)	5 A (24/110/230 V AC)

Diagnostics

Status indication LED	red
-----------------------	-----

Device protection

Condition lifetime	load-dependent
--------------------	----------------

Device protection | Electrical

Rated surge voltage	4 kV
Electrical lifetime	50000000 Cycles

Device protection | Mechanical

Mechanical endurance	50000000 Cycles
----------------------	-----------------

Mechanical data

Drop-out time max.	10 ms
Response time max.	10 ms
Bounce time max.	2 ms

Mechanical data | Material data

Material contact	Ag hv
------------------	-------

Mechanical data | Mounting data

Mounting method	geschnappt
Suitable for mounting type	Mounting rail TH35, G32, (EN 60715)
Height	75 mm
Width	22,5 mm
Depth	102 mm

Environmental characteristics | Climatic

Operating temperature min.	-20 °C
Operating temperature max.	50 °C

Connection type 4

Connection	Screw terminals SK
------------	--------------------

Family construction form	terminal
Gender	female
No. of poles	3
PIN 1	+ A 11
PIN 2	+ A 21
PIN 3	+ A 31
Connection	Screw terminals SK
Family construction form	terminal
Gender	female
No. of poles	3
PIN 1	- A 2
PIN 2	+ A 41
Connection	Screw terminals SK
Family construction form	terminal
Gender	female
No. of poles	4
PIN 1	13
PIN 2	14
PIN 3	23
PIN 4	24
Connection	Screw terminals SK
Family construction form	terminal
Gender	female
No. of poles	4
PIN 1	43
PIN 2	44
PIN 3	33
PIN 4	34